



Escondido Metal Supply features a wide variety of attractive light gauge metal panels protected with Zincalume®. These panels are noted for their durability and lifetime warranty.

Metal Cladding Applications

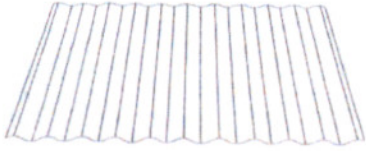

2 1/2" Corrugated

(24" net coverage, 26" gross coverage, Also available in 27 1/2" gross coverage)

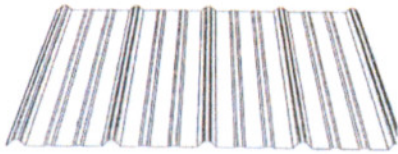


Strata Rib®

(36" coverage)




Skyline Roofing®

(12" Coverage and 16" coverage)

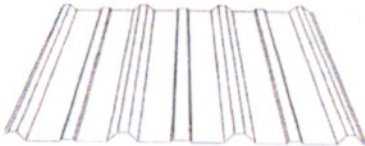


Delta Rib

(24" coverage or 36" coverage*)

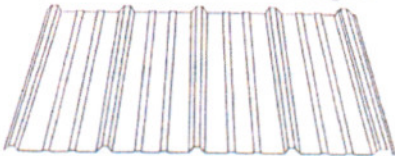

Nor-Clad®

(36" coverage)

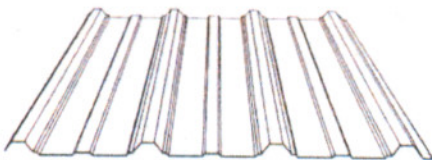

Super-Span®

(36" coverage)

Through fastener panels including Delta Rib, 2-1/2" Corrugated, Strata Rib and Nor-Clad offer simple installation and excellent durability.

Skyline Roofing, an economical standing seam system provides an attractive, clean, hidden-fastener roof that enhances structures while providing a tough exterior.

Super Span adds the ability to span greater spacing of supports and maintain its durability.

Pre-application considerations:

- You should always consult with your local building officials and the applicable building codes prior to construction before building any structure.
- All types of roofing have the potential for condensation on their underside. The use of non-perforated 30 lb. felt, proper insulation and adequate ventilation of roof areas will minimize this problem for applications where interior dryness is critical.
- Steel roofing should not be in contact with lead, aluminum, copper, alkalines, treated lumber, fertilizers, acids, or poorly vented animal confinement areas. Only zinc coated, stainless steel or long life coated fasteners should be used for exposed-fastener applications.
- Metal roofing requires a smooth, flat and true to plane substrate or supports. Application over rough and/or uneven surfaces is not recommended. Do not apply metal roofing over materials with structural damage or trapped moisture.
- Certain flashings such as eave, valley, etc., need to be installed prior to the panels.

Maintenance:

- In clean, rural areas, an annual washing with clean water is suggested.
- If the metal panels become dirty during erection, wash the affected areas with clear water. Stubborn stains can be removed by washing with a Tri-Sodium Phosphate solution, or similar solution, and rinsing well with water.
- Do not use strong alkaline or abrasive cleaners, thinners, or solvents to clean the metal panels.